


General Specifications for Models "SunRise 850, 1050, and 1250"


| | |
|----------------------------|---|
| Solar Panel: | 850 – 11 watt amorphous thin-film flexible module 1050 – 15 watt crystalline with tempered glass 1250 – 20 watt crystalline with tempered glass |
| Motor: | 38volt DC with external brushes. |
| Wire: | 18/2 red/black, or white/black where white is red (positive) |
| Fan Blade: | 12" diameter, 5-blade aluminum with balanced hub. |
| Hardware: | Stainless steel brackets, fasteners, and screen. Aluminum rivets. |
| Top and Base: | UV-Stabilized ABS with acrylic cap (paintable). |
| Airflow: | 850 - Effective for attics up to 1200 Square Feet 1050 - Effective for attics up to 1600 Square Feet 1250 - Effective for attics up to 1800 Square Feet |
| Unit Dimensions: | Outside dimension of Top: 25 1/2" x 21 1/4". Height off roof deck: 7" |
| Flat Base Flashing: | 24 1/2" x 24 1/2" |
| Curb Base Flashing: | 20" x 20" (inside curb dimension) |
| Gable Fan: | 24 1/2" x 24 1/2" (motor housing has a 7" projection) |
| Package Size: | 27 1/4" x 25 1/2" x 11 1/4" wide |
| Shipping Weight: | 16 lbs - "SunRise 850" 18 lbs - "SunRise 1050" 18.5 lbs - "SunRise 1250" |

Flat-Base Model For normal sloped shingle roofs

Flat Model – Side View

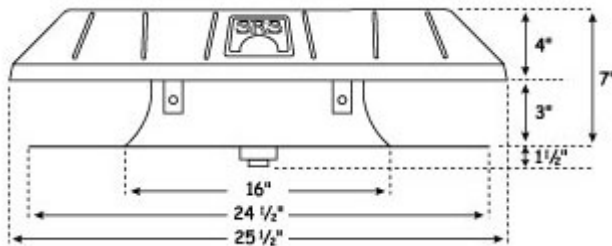


Top View



Curb-Base Model For low-slope or flat roofs

Curb Model – Side View

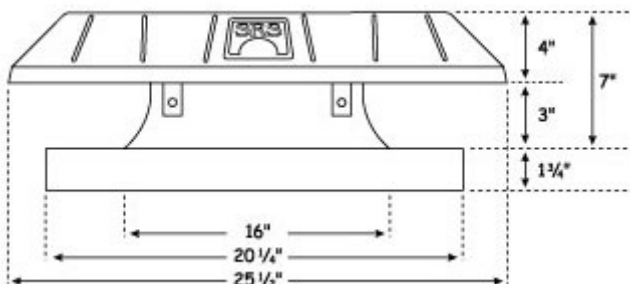

Top View

